
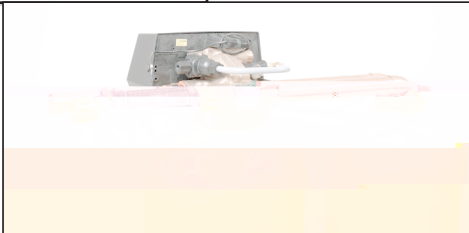


Model 9500

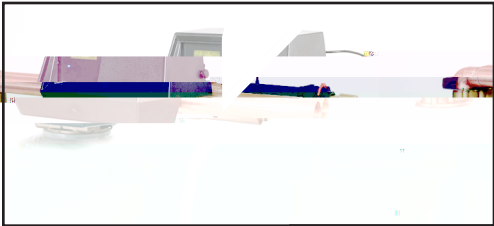

- Fully adjustable 5-cycle control delivers controlled upflow backwash, downflow brining, slow rinse, rapid rinse, timed brine refill and downflow service
 - Easily-adjustable, 5-cycle, downflow-brining control
 - Backwash capability handles up to 24" diameter tanks eliminating excessive, space wasting multiple tank installations
 - Rugged, long-life construction features a lead-free brass* valve body
 - Total flexibility in meter and timer setting
 - Satisfies operational needs from 310 to 53,125 gallons
 - Uses conditioned water for regeneration
 - Salt and water savings by using 100% capacity of the tank in service before switching to the second tank
 - Regenerates immediately when needed for continuous soft water
 - Regenerates with soft water and keeps system clean for optimum operating efficiency and minimum maintenance
-
- Bypass valve (Fiber-reinforced polymer or lead-free brass*)
 - Hot water (150°F max., 1" meter only)
 - Auxiliary switches
 - 3200 mechanical timer, SXT or XT electronic timer
 - Cover with window for electronic timers

Valve Specifications

Valve material	Lead-free brass*
Inlet/Outlet	1-1/2" NPTF
Cycles	5

Continuous (15 psi drop)	38 GPM
Peak (25 psi drop)	49 GPM
Cv (flow at 1 psi drop)	9.8
Max. backwash (25 psi drop)	16 GPM

Downflow/Upflow	Downflow only
Adjustable cycles	Yes
Time available	Electromechanical: 82 or 164 minutes SXT: 0 - 199 minutes per cycle XT: 240 minutes per cycle

Meter accuracy	1-1/2 - 75 GPM
Meter capacity range (gal.)	Standard: 625 - 10,625 Extended: 3,125 - 53,125 SXT: 1 - 999 900 XT: 1,000 - 9,900,000

Distributor pilot	1.5" pipe I.D.
Drain line	1" NPTM
Injector brine system	1/2" & 3/8"
Mounting base	4" - 8 UN
Height from top of tank	7-1/4"

Water softener	10" - 24" diameter
----------------	--------------------

Electrical rating	24 v, 110 v, 200 v - 50 Hz, 60 Hz
Max. VA	8.9
Estimated shipping weight	Metered value: 48 lbs.
Pressure	Hydrostatic: 300 psi Working: 25 - 125 psi
Temperature	34° - 110° F

* As defined in the U.S. EPA Safe Drinking Water Act; the product also meets California Proposition 65 Standards

